
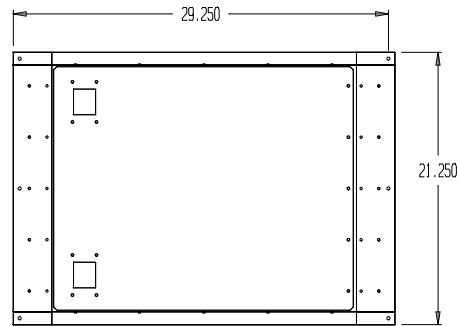


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED




Breaker One on Aux Outlet Panel supplies power for Littlite and Test Hot-Patch

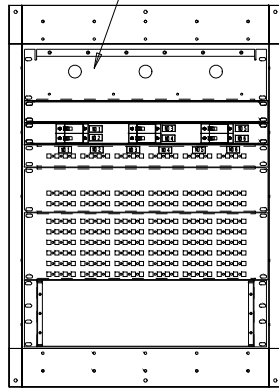

Rock Technical Specs

- 1) Total Rack Dinner Capacity is 960 Amps
- 2) DMX cable is twisted pair approved for RS-422/RS-485 use (Belden 9841 or Alpha 5271)
- 3) DMX Input is 5 pin XLR type
 - a. Pin 1 is common, shield
 - b. Pin 2 is DATA minus
 - c. Pin 3 is DATA plus
- 4) U-Ground parallel blade outlets are rated at 15 amps per circuit, 120 volts
- 5) Socapex/Amphenol 19 Pin connector 12 AWG wire, 25 amps per circuit

Steel Case 60-08-0051

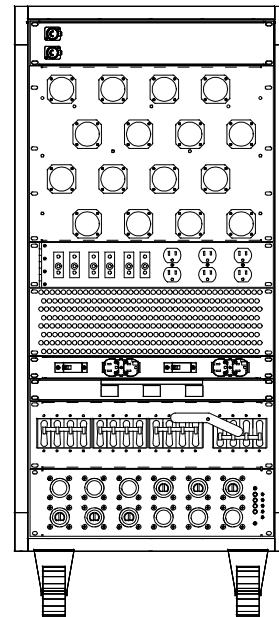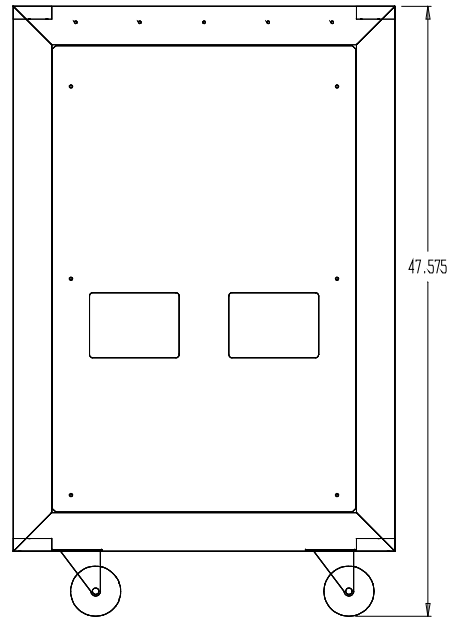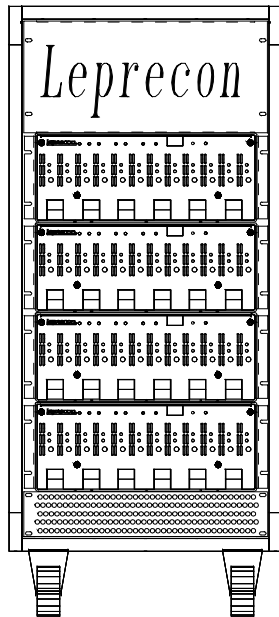

Leprecon LLC
P.O. Box 62
 1000 Lakeside Drive, Hastings, NE
 68404-0062 (402) 228-9292
 www.leprecon.com

DESC: Rack, VX Deluxe
 48 Channel, Steel Case

SIZE: E Date: 24/May/05 Part Number: 90-08-0242 REV: A

Updated Drawing 24/May/05, rack case number

P:\Approved Rack\08-08-0242.ppt

Scale: 0.25 Draw: TJS

Sheet 1 of 1